

6~216C ADSS Cable Data Sheet

Features:

- Comply with ITU specifications.
- Comply with ITU, IEC and EIA/TIA-FOTP test standards.
- Reliability and stability.
- Cost savings & high efficiency on cable installation.
- Light weighted, bending resistant for installation at inhospitable area.
- Water penetration resistant.
- Free from EMI.
- Comply with ISO 9001.

Applications:

- Long span optical communication system.
- LAN
- High speed transmitting system.
- Data, voice, video, and telecom applications.
- Excellent performance for operation under static and EMI interference.
- FTTX installation.

Date: 2012/12/04

The information contained in this data sheet is subject to normal manufacturing tolerances. Specifications are subject to change without notice.

BAYCOM OPTO-ELECTRONICS TECHNOLOGY CO., LTD.

23, R&D ROAD 2, SCIENCE- INDUSTRIAL PARK HSINCHU CITY 300 TAIWAN .

E-mail : info@baycom.com.tw



Website : <http://www.baycom.com.tw>

TEL : +886-3-5786178

FAX : + 886-3-5770650

Document No. : FM70306A

Construction:

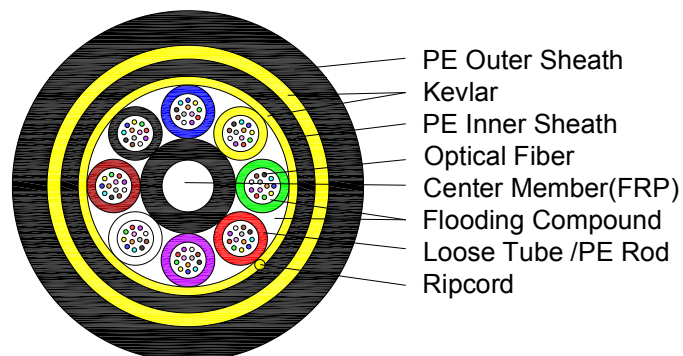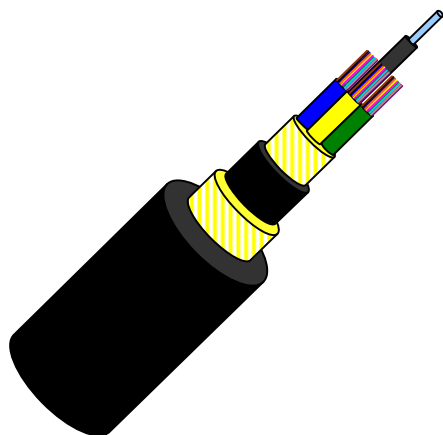

Specification :

Item		Specification Chart						
		6C Clusters			12C Clusters			
Fiber QTY		6~30	36	48	72	96	144	216
No. of Loose Tube (Included PE Rod)		5	6	8	6	8	12	18
FRP	O.D. (mm)	2.2	2.7	3.0	3.0	3.0	3.0	3.0
	PE Sheath O.D. (mm)	2.2	2.7	4.2	3.3	5.5	9.5	3.3
Thickness of PE Sheath (mm)		2.0	2.0	2.0	2.0	2.0	2.0	2.0
Cable O.D. (mm)		15.8	16.3	18.2	18.2	20.3	24.3	22
Weight of Cable (kg/km)		180	200	235	235	285	400	390
Max. Allowance of Pulling Force (N)		16000						
Min. Bending Radius		20D(Operating) 、10D(Storage & Operation) , D=Cable Outer Diameter						
distance (m)		≤200						
Operating Temp.		-20 ~ +80℃						
Storage & Operation Temp.		-20 ~ +80℃						
Mechanical Tests	Item			Test Method			Spec(Db/km)	
	Crush Resistance			TIA/EIA-455-41A or IEC 60794-1-2-E3			< 0.2dB	
	Cable cyclic flexing			TIA/EIA-455-104A or IEC 60794-1-2-E6			< 0.2dB	
	Impact Resistance			TIA/EIA -455-25B or IEC 60794-1-2-E4			< 0.2dB	
	Twist test			TIA/EIA-455-85A or IEC 60794-1-2-E7			< 0.2dB	
	Tensile loading and bending test			TIA/EIA-455-33A or IEC 60794-1-2-E1			< 0.2dB	
Quality Assurance System								
●Comply with IEC & EIA testing standards ●Approved by CHT, Taiwan. ●ISO9001 Certified.								

Date: 2012/12/04

The information contained in this data sheet is subject to normal manufacturing tolerances. Specifications are subject to change without notice.